
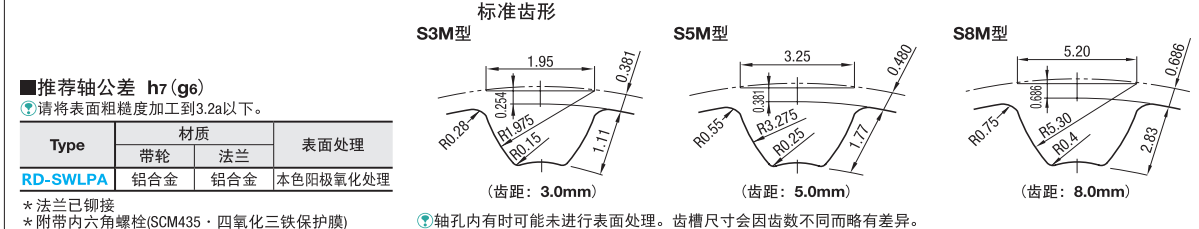


# 夹持型高扭矩同步带轮 S3M · S5M · S8M型

Order 订货示例 型式 ①Type · ②齿数 · ③种类 · 公称宽度 - ④d  
RD-SWLP A36S3M060 - 6

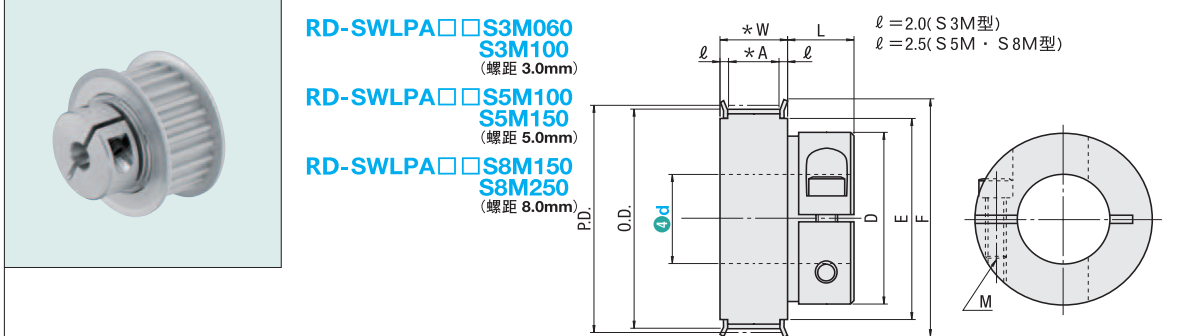

### 推荐轴公差 h7 (g6)

请将表面粗糙度加工到3.2a以下。

Type	材质	法兰	表面处理
RD-SWLP A	铝合金	铝合金	本色阳极氧化处理

\* 法兰已铆接  
\* 附带内六角螺栓(SCM435 · 四氧化三铁保护膜)

### S3M型

①Type	②齿数	③种类 · 公称宽度	④d 选择	P.D.	O.D.	D	F	E	L	紧固螺栓	
										M	紧固扭矩 (N·m)
RD-SWLP A	24	S3M060 * A: 7 * W: 11	4	22.92	22.16	13	25	16	9	M2×8	0.4
	26		4	24.83	24.07		28	18			
	28		4	26.74	25.98		30	20			
	30		6 8	28.65	27.89		32	23			
	32	6 8	30.56	29.80	35	25	26	M3×10	1.5		
	36	6 8	34.38	33.62	40	28					
	40	8 10	38.20	37.44	44	32	31	M4×14	3.5		
	44	8 10	42.02	41.25	48	36					
	48	8 10 11 12	45.84	45.07	50	38	36	M5×16	6		
	50	8 10 11 12 13 14	47.75	46.98	52	40					
60	8 10 11 12 13 14 15 16	57.30	56.53	61	46	15.5					

### S5M型

①Type	②齿数	③种类 · 公称宽度	④d 选择	P.D.	O.D.	D	F	E	L	紧固螺栓		规格有无			
										M	紧固扭矩 (N·m)	S5M100 d≤19/20≤d	S5M150 d≤19/20≤d		
RD-SWLP A	24	S5M100 * A: 11 * W: 16	8 10	38.20	37.24	26	45	30	12.5	M3×10	1.5	●	●		
	25		8 10	39.79	38.83							28	18	●	●
	26		8 10	41.38	40.42							30	20	●	●
	28		8 10	44.56	43.60							31	48	35	14
	30		10	47.75	46.79	52	36	15.5	M5×16	6	●	●			
	32		10 11 12 13 14	50.93	49.97	36	55				40	●	●		
	34		10 11 12 13 14 15 16	54.11	53.15	41	61				45	●	●		
	36		10 11 12 13 14 15 16	57.30	56.34	46	67				50	●	●		
	40		10 11 12 13 14 15 16 17 18 19	63.66	62.70	46	74	58	15.5	M5×16	6	●	●		
	44		12 13 14 15 16 17 18 19	70.03	69.07	55	74	58	16.5	M6×20	12	●	●		
	48		12 13 14 15 16 17 18 19	76.39	75.43	46	83	63	15.5	M5×16	6	●	●		
	50		20 21 22 23 24 25	79.58	78.62	55	87	67	16.5	M6×20	12	●	●		
	60		12 13 14 15 16 17 18 19	95.49	94.53	46	99	80	15.5	M5×16	6	●	●		
			20 21 22 23 24 25			55			16.5	M6×20	12	●	●		

### S8M型

①Type	②齿数	③种类 · 公称宽度	④d 选择	P.D.	O.D.	D	F	E	L	紧固螺栓					
										M	紧固扭矩 (N·m)				
RD-SWLP A	20	S8M150 * A: 17 * W: 22	12 13 14	50.93	49.56	36	58	40	14	M4×14	3.5				
	22		12 13 14 15 16	56.02	54.65							41	61	45	
	24		12 13 14 15 16 17 18 19	61.12	59.74							46	70	56	
	25		12 13 14 15 16 17 18 19	63.66	62.29										
	28		15 16 17 18 19	71.30	69.93	55	80	60	16	M5×16	6				
	30		20 21 22 23 24 25	76.39	75.02							46	87	67	
	32		15 16 17 18 19	81.49	80.12							55			16
	34		20 21 22 23 24 25									46	16	M5×16	6
	36		18 19	86.58	85.21	55	17	M6×20	12						
			20 21 22 23 24 25			46	16	M5×16	6						
	36		18 19	91.67	90.30	55	99	80	16	M5×16	6				
			20 21 22 23 24 25			55	17	M6×20	12						

### 容许扭矩 (S3M型)

①Type	②齿数	③轴径	容许扭矩 (N·m)
RD-S3M	24 26 28	4	0.16
	30 32	6	0.95
		8	2.6
	36	6	0.95
		8	2.6
	40	8	2.6
		10	2.6
	44	8	2.6
		10	2.6
	48	8	2.6
10		2.6	
11		2.6	
12		2.6	
50	8	2.6	
	10	2.6	
	11	2.6	
	12	2.6	
	13	7.6	
	14	7.6	
60	8	2.6	
	10	2.6	
	11	2.6	
	12	2.6	
	13	7.6	
	14	7.6	
	15	7.6	
	16	7.6	

### 容许扭矩 (S5M型)

①Type	②齿数	③轴径	容许扭矩 (N·m)
RD-S5M	24 25	8	2.6
	26 28	10	2.6
		10	2.6
	30	10	2.6
		10	2.6
	32	11	2.6
		12	2.6
		13	7.6
		14	7.6
	34 36	10	2.6
11		2.6	
12		2.6	
13		7.6	
14		7.6	
15		7.6	
40	10	2.6	
	11	2.6	
	12	2.6	
	13	2.6	
	14	7.6	
	15	7.6	
	16	7.6	
	17	7.6	
	18	7.6	
	19	7.6	
44 48 50 60	12	2.6	
	13	2.6	
	14	2.6	
	15	2.6	
	16	7.6	
	17	7.6	
	18	7.6	
	19	7.6	
	20	48	
	21	66	

### 容许扭矩 (S8M型)

①Type	②齿数	③轴径	容许扭矩 (N·m)
RD-S8M	20	12	2.6
		13	2.6
	22	12	2.6
		13	2.6
24 25	12	2.6	
	13	2.6	
	14	7.6	
	15	7.6	
	16	7.6	
	17	7.6	
28 30	12	2.6	
	13	2.6	
	14	7.6	
	15	7.6	
	16	7.6	
	17	7.6	
	18	7.6	
	19	7.6	
	20	48	
	21	66	
32 34 36	18	7.6	
	19	7.6	
	20	48	
	21	48	
	22	66	
	23	66	

交货期 报价确定