

RD25Q.3.N系列 - 桥式内侧可打开

Series of RD25Q.3.N-Bridge tupe interior opening



闭合状态：
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注：无字母为普通型
Note: blank means general type

打开方式：
Opening way:


- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式：
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- B.F.S** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening


接头类型：
Bracket type:

- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket

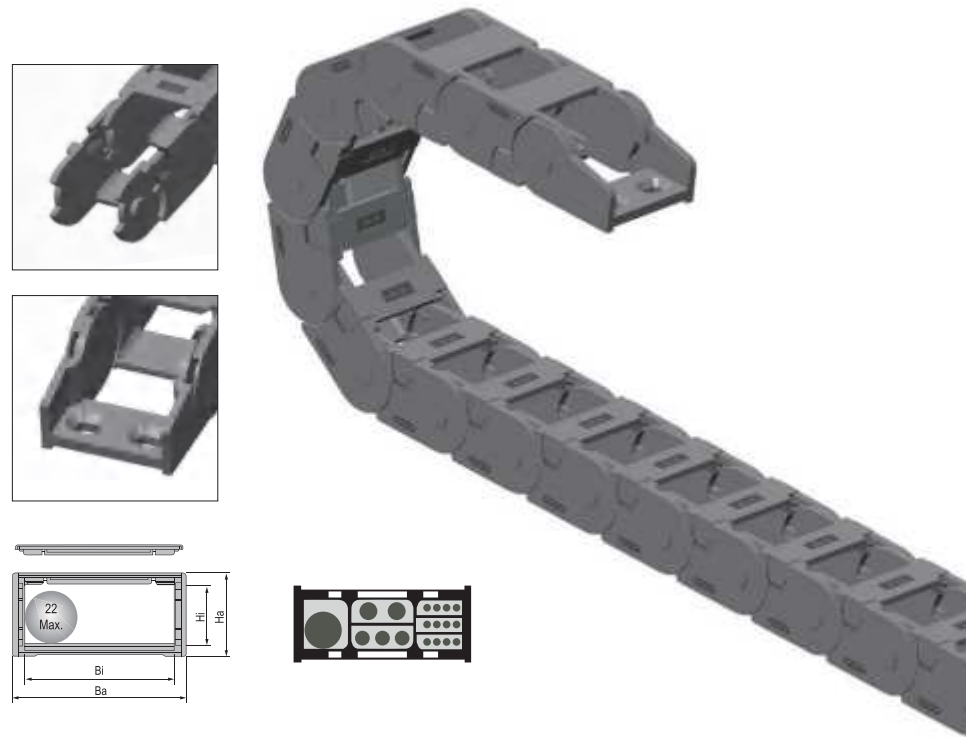

- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The inclined "X" type connector can be mounted pectinate plate to fix cable.(See accessories table)
- ◎ The cable chain is suitable for a diameter of 22mm or less of cable.
- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内侧挡片打开，方便检查或更换线缆
- ◎ "X" 型接头可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径 22 毫米以下线缆

主要技术参数 Basic technical data

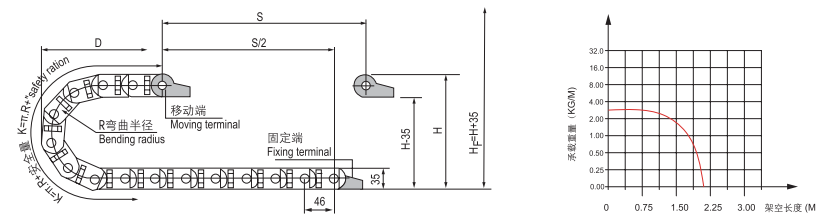


RD25Q.3.N系列 - 桥式内侧可打开 Series of RD25Q.3.N-Bridge tupe interior opening



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						代号 No.
								A	B	C	D	E	F		
RD25Q.3.38N	25	38	35	54	Q.N	55,75,100	X ₂	6*10L	25	41	12	54	RD25Q.3.38N-XJT		
RD25Q.3.57N	25	57	35	73	Q.N		X ₂	6*10L	45	41	12	73	RD25Q.3.57N-XJT		
RD25Q.3.77N	25	77	35	93	Q.N	55,100	X ₅	6*12L	57	41	12	93	RD25Q.3.77N-XJT		

注：N 表示内侧打开
Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

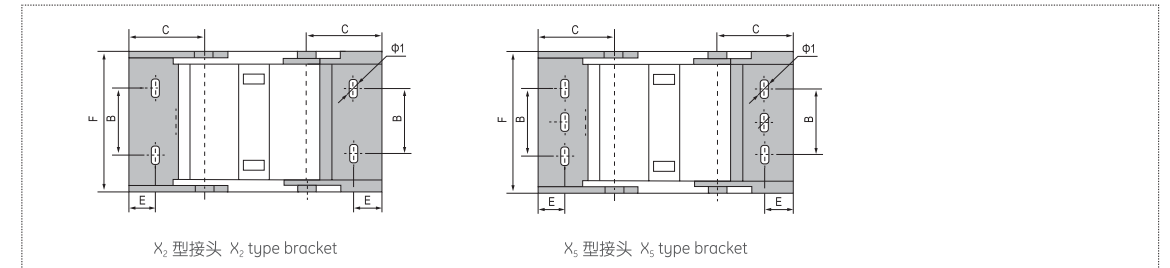

订货示例 Order Sample

示例 拖链内高 25mm、内宽 38mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 38mm, radius 55mm, length 1 meter / 22 links)

拖链 Chain RD25Q.3.38N R55 1000mm /22 Links
接头 Bracket RD25Q.3.38N -XJT 副 (Set)

配件 Accessories

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.